A Test of the Capabilities of CHIEF in the Numerical Calculation of Acoustic Radiation from Arbitrary Surfaces

A. L. Van Buren

Transducer Branch
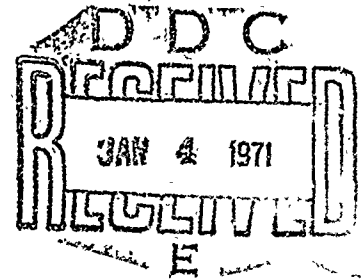*Acoustics Division*

November 12, 1970

NAVAL RESEARCH LABORATORY
Washington, D.C.

DISCLAIMER NOTICE

THIS DOCUMENT IS BEST QUALITY
PRACTICABLE. THE COPY FURNISHED
TO DTIC CONTAINED A SIGNIFICANT
NUMBER OF PAGES WHICH DO NOT
REPRODUCE LEGIBLY.

CONTENTS

i

ABSTRACT

The computer program CHIEF was designed by Schenck and Barach of the Naval Undersea Research and Development Center to obtain approximate solutions to exterior steady-state acoustic radiation problems for surfaces of arbitrary shape vibrating with a prescribed normal velocity. To test its capabilities as a research tool, CHIEF was applied to several problems for which accurate answers have been obtained using harmonic expansions. The accuracy and computation time of the results using CHIEF are discussed in terms of the surface subdivision scheme and the number of Gaussian quadrature points used to evaluate the Helmholtz integrals. In addition, new input subroutines to CHIEF which provide numerous geometrical options are also discussed.

PROBLEM STATUS

AUTHORIZATION

A TEST OF THE CAPABILITIES OF CHIEF
IN THE NUMERICAL CALCULATION OF ACOUSTIC
RADIATION FROM ARBITRARY SURFACES

INTRODUCTION

The computer program CHIEF as developed by Schenck (1) and Barach (2) is designed to obtain approximate solutions to exterior steady-state acoustic radiation problems for surfaces of arbitrary shape vibrating with a prescribed normal velocity. To test its capabilities as a research tool, CHIEF was applied to several problems for which accurate answers have been obtained using harmonic expansions.

The first examples involve the acoustic radiation from an oblate spheroid whose top half is vibrating with unit normal velocity and whose bottom half is rigid. The acoustic radiation impedance of the top half and the mutual radiation impedance coefficient between the two halves of the spheroid obtained using CHIEF are compared with results obtained using a harmonic expansion in oblate spheroidal harmonic functions. A Fortran computer program called OBRAD (3) was used to accurately evaluate the necessary spheroidal functions.

An example designed to test CHIEF's ability to handle a multiple surface is that of the radiation of a uniformly pulsating sphere in the presence of a similar stationary sphere. Here the results from CHIEF are compared with those of New (4), who has obtained accurate values for both the near-field and the far-field pressures using a harmonic expansion in terms of spherical functions.

The accuracy and computation time of the results using CHIEF are discussed in terms of the surface subdivision scheme and the number of Gaussian quadrature points used to evaluate the non-self Helmholtz integrals. In addition, new input subroutines to CHIEF which provide numerous geometrical options are discussed. A computer printout of these subroutines is given in the appendix.

REVIEW OF THE COMBINED HELMHOLTZ INTEGRAL
EQUATION FORMULATION (CHIEF)

Consider a finite region bounded by the regular, closed surface S, as shown in Fig. 1. Let an arbitrary point on the surface be denoted by ξ. The region exterior to S is assumed to be filled with an ideal, homogeneous fluid of density ρ and sound speed c. Let an arbitrary point in this exterior region be denoted by $\bar{x}$. The surface S is vibrating at an angular frequency ω with a known normal velocity distribution $v(\xi)$. The steady-state pressure $p(\bar{x})$ may be obtained by solving the Helmholtz scalar wave equation,

$$\left(\nabla^2 + k^2\right) p\,(\bar{x}) = 0, \tag{1}$$

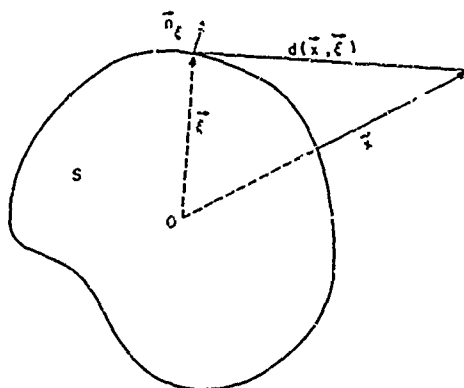where $k = \omega/c$. The time dependence $e^{i\omega t}$ has been suppressed.

Fig. 1. – An arbitrary surface S

The solution to Eq. (1) must be finite and must satisfy the radiation condition at infinity,

$$\lim_{R \to \infty} \int_{S_R} \left| \frac{\partial p(\vec{x})}{\partial r} + ikp(\vec{x}) \right|^2_{r=R} dS = 0, \tag{2}$$

where S_R is the surface of a sphere of radius R surrounding the surface S. In addition, the pressure $p(\vec{x})$ must satisfy the boundary condition on S,

$$\frac{\partial p}{\partial n_\xi} = - i\omega\rho v(\vec{\xi}), \tag{3}$$

where $\partial/\partial n_\xi$ denotes the outward normal derivative evaluated at the surface point $\vec{\xi}$. The solution to Eq. (1) which satisfies the boundary conditions, Eq. (2) and Eq. (3), is given by

$$p(\vec{x}) = \frac{1}{4\pi} \int_S \left\{ p(\vec{\xi}) \frac{\partial}{\partial n_\xi} \left[\frac{e^{-ikd(\vec{x},\vec{\xi})}}{d(\vec{x},\vec{\xi})} \right] + i\omega\rho v(\vec{\xi}) \frac{e^{-ikd(\vec{x},\vec{\xi})}}{d(\vec{x},\vec{\xi})} \right\} dS(\vec{\xi}), \tag{4}$$

where $d(\vec{x}, \vec{\xi})$ is the distance between the exterior point $\vec{x}$ and the surface point $\vec{\xi}$.

This expression allows $p(\vec{x})$ to be evaluated when the pressure on the surface $p(\vec{\xi})$ is known. In order to obtain $p(\vec{\xi})$, the point of observation $\vec{x}$ is allowed to approach the surface. When the limiting process is properly performed, one obtains the surface Helmholtz integral formulation,

$$p(\vec{\xi}') = \frac{1}{2\pi} \int_S \left\{ p(\vec{\xi}) \frac{\partial}{\partial n_\xi} \left[\frac{e^{-ikd(\vec{\xi}',\vec{\xi})}}{d(\vec{\xi}',\vec{\xi})} \right] + i\omega\rho v(\vec{\xi}) \frac{e^{-ikd(\vec{\xi}',\vec{\xi})}}{d(\vec{\xi}',\vec{\xi})} \right\} dS(\vec{\xi}). \tag{5}$$

If the field point is taken interior to the surface S, one obtains the interior Helmholtz integral formulation,

$$0 = \frac{1}{4\pi} \int_S \left\{ p(\vec{\xi}) \frac{\partial}{\partial n_\xi} \left[\frac{e^{-ikd(\vec{y},\vec{\xi})}}{d(\vec{y},\vec{\xi})} \right] + i\omega\rho v(\vec{\xi}) \frac{e^{-ikd(\vec{y},\vec{\xi})}}{d(\vec{y},\vec{\xi})} \right\} dS(\vec{\xi}), \tag{6}$$

where $\vec{y}$ is the interior point.

The CHIEF program solves for the surface pressure $p(\vec{\xi})$ using Eq. (5) and, if necessary, Eq. (6).

In order to solve Eq. (5), the surface is subdivided into small areas. The normal particle velocity is chosen to be constant over each subdivision, and it is assumed that the pressure is constant over each subdivision. The latter assumption is an approximation that will be good only if the true pressure does not vary much over each subdivision. The approximation can be improved, if necessary, by further subdivision of the surface.

The surface integrals in Eq. (5) can now be broken up into integrations over each subdivision S_β, giving

$$2\pi p(\vec{\xi}') = \sum_\beta p_\beta \int_{S_\beta} \frac{\partial}{\partial n_\xi} \left[\frac{e^{-ikd(\vec{\xi}',\vec{\xi}_\beta)}}{d(\vec{\xi}',\vec{\xi}_\beta)} \right] dS(\vec{\xi}_\beta)$$

$$+ i\omega\rho \sum_\beta v_\beta \int_{S_\beta} \frac{e^{-ikd(\vec{\xi}',\vec{\xi}_\beta)}}{d(\vec{\xi}',\vec{\xi}_\beta)} dS(\vec{\xi}_\beta),\qquad (7)$$

where p_β and v_β are the pressure and normal particle velocity for the subdivision S_β.

If the observation point $\vec{\xi}'$ is chosen to be on S_α, one obtains a set of simultaneous equations in the unknown pressures,

$$\sum_\beta A_{\alpha\beta}\, p_\beta = \sum_\beta B_{\alpha\beta}\, v_\beta,\qquad (8)$$

where $A_{\alpha\beta}$ and $B_{\alpha\beta}$ are given by

$$A_{\alpha\beta} = 2\pi\delta_{\alpha\beta} - \int_{S_\beta} \frac{\partial}{\partial n_\xi} \left[\frac{e^{-ikd(\vec{\xi}_\alpha,\vec{\xi}_\beta)}}{d(\vec{\xi}_\alpha,\vec{\xi}_\beta)} \right] dS(\vec{\xi}_\beta),\qquad (9)$$

where $\delta_{\alpha\beta}$ is the Kronecker delta,

and

$$B_{\alpha\beta} = \int_{S_\beta} \frac{e^{-ikd(\vec{\xi}_\alpha,\vec{\xi}_\beta)}}{d(\vec{\xi}_\alpha,\vec{\xi}_\beta)}\, dS(\vec{\xi}_\beta).\qquad (10)$$

The Helmholtz integrals given in Eqs. (9) and (10) are numerically evaluated in CHIEF using a Gaussian quadrature over both surface coordinates. For the so called non-self Helmholtz integrals, when $\alpha \neq \beta$, the user of CHIEF must input the number of quadrature points used to evaluate the integral. The self integrals, i.e., when $\alpha = \beta$,

are automatically evaluated by first subdividing the integrals into four pieces and then
evaluating each piece using 16-point Gaussian quadratures over both surface coordinates.
Obviously, the choice of the number of quadrature points to be used for the non-self
integrals is influenced by the surface subdivision scheme.

If the frequency is near one of the characteristic frequencies for the interior homo-
geneous Dirichlet problem, the simultaneous equations, Eq. (8), will not yield the cor-
rect surface pressures. In this case additional equations are obtained using the interior
Helmholtz integral formulation for carefully chosen interior points. These equations
add no more unknowns but provide additional equations of constraint for the surface
pressures leading to an overdetermined system. Since only the correct set of surface
pressures satisfies these additional equations, their addition tends to force the solution
to the desired one. The choice of the number and the location of the interior points is a
difficult problem. The examples discussed in this paper will not require any interior
points. This will allow an uncluttered examination of the more basic question confronting
the user of CHIEF: how do both the accuracy and the computation time depend on the
surface subdivision scheme and the number of quadrature points?

COMPARISON OF RESULTS

Example I. Oblate Spheroid

The first example is that of radiation from an oblate spheroid, as shown in Fig. 2.
Here ξ, the radial coordinate specifying the oblate spheroidal surface, is chosen equal
to 0.2. The ratio of major to minor axes is then given by $\sqrt{(\xi^2+1)}/\xi \doteq 5.0$. The param-
eter h, defined to be π times the ratio of the distance between the foci of the elliptical
cross section to the wavelength, is a measure of the acoustical size. Here h is chosen
equal to unity to insure that the frequency is well below the lowest characteristic fre-
quency for the interior homogeneous Dirichlet problem. For this example the top half
of the surface is specified to be vibrating with unit normal velocity. Of interest are the
self acoustic radiation impedance coefficient of the top half and the mutual acoustic
radiation impedance coefficient between the two halves. These were first calculated
analytically using a harmonic expansion in oblate spheroidal wave functions. Sufficient
spheroidal functions were generated to achieve convergence of the series to at least four
places of accuracy in both the resistive and the reactive parts of the impedance.

Fig. 2. – Subdivided oblate spheroid

The problem was then input to CHIEF for various subdivision schemes. CHIEF is
designed to take advantage of rotational and reflective symmetry in the geometry, greatly
reducing the computation time in these cases. In order to use rotational symmetry, the
spheroid was first subdivided into strips resembling orange sections. Each strip was
then further subdivided into bands. The number of Gaussian quadrature points for the
non-self Helmholtz integrals was selected for both surface coordinates. The normal
particle velocity was input as unity for the top half and zero for the bottom half of the
spheroid.

CHIEF was used to obtain the surface pressures p_a for each subdivison. The nor-
malized self radiation impedance coefficient for the top half of the spheroid, z_{self}, was
then calculated using

$$Z_{self} = R_{self} + iX_{self} = \frac{\sum\limits_{a=1}^{n} P_a S_a}{\rho c v \sum\limits_{a=1}^{n} S_a},$$

(11)

where S_a is the area of the ath subdivision, and $a = 1$ to n includes only the subdivisions on the top half of the spheroid. R_{self} and X_{self} are the resistive and reactive components of the impedance. Here $v = 1$ m/sec is the normal particle velocity. The normalization factor

$$\rho c \sum\limits_{a=1}^{n} S_a$$

makes Z_{self} dimensionless.

Similarly, the normalized mutual radiation impedance coefficient between the two halves, Z_{mutual}, was calculated using

$$Z_{mutual} = R_{mutual} + iX_{mutual} = \frac{\sum\limits_{a=n+1}^{N} P_a S_a}{\rho c v \sum\limits_{a=n+1}^{N} S_a},$$

(12)

where $a = n + 1$ to N includes only the subdivisions on the bottom half of the spheroid.

The results for this case are summarized in Table 1. The impedances calculated using the harmonic expansion are given in the last line. The column labeled "time in seconds" indicates the computation time required to determine the surface pressures using the CDC 3800 computer at NRL.

The first CHIEF model had 12 strips, 6 bands, used a 2-point Gaussian quadrature for both surface coordinates (denoted 2 × 2), and required 36 sec of computation time. The results are good except for the mutual reactance. As the quadrature is increased, the accuracy improves, with the 8 × 8 quadrature giving surprisingly good results for 76 sec of computer time.

If 24 strips and 12 bands are used, a 2 × 2 quadrature again gives a poor value for the mutual reactance. As the quadrature increases, the accuracy again improves. In general, the accuracy should be better for increased subdivision for the same quadrature. However, possible random errors may cancel, yielding significantly greater accuracy for the coarser subdivision scheme. This is apparently the case for the model using 12 strips, 6 bands, and an 8 × 8 quadrature.

Apparently good results can be obtained for this oblate spheroid using rather crude surface subdivision and a small number of quadrature points. It is important to note that the far-field pressure pattern does not depend on the radiation reactance and will be extremely accurate for all of the models except those using a 2 x 2 quadrature. Because of the smallness of the mutual reactance, the near-field pressures should also be accurate for all but the 2 x 2 quadrature.

Table 1
Results for the Spheroid with $\xi = 0.2$, $h = 1.0$

Number of Strips	Number of Bands	Number of Quadrature Points	Time (sec)	R_{self}	X_{self}	R_{mutual}	X_{mutual}
12	6	2 × 2	36	0.2364	0.5063	0.1830	0.06148
12	6	4 × 4	49	0.2371	0.5254	0.1760	0.03996
12	6	8 × 8	76	0.2369	0.5285	0.1743	0.03508
24	12	2 × 2	106	0.2361	0.5172	0.1767	0.04543
24	12	4 × 4	154	0.2360	0.5234	0.1751	0.03936
24	12	6 × 6	227	0.2361	0.5246	0.1748	0.03823
24	12	8 × 8	338	0.2361	0.5249	0.1748	0.03791
Harmonic expansion			20	0.2369	0.5287	0.1739	0.03481

Example II. Thin Oblate Spheroid

Next consider the radiation from a thin oblate spheroid whose top half is vibrating with unit velocity and whose bottom half is rigid. Here $h = 1.0$, and $\xi = 0.02$ so that the ratio of major to minor axes is very nearly equal to 50. The radiation impedance of the top half of the spheroid and the mutual radiation impedance coefficients between the two halves of the spheroid were calculated using a harmonic expansion in spheroidal wave functions and using CHIEF with various subdivision schemes. The results are given in Table 2.

Table 2
Results for the Spheroid with $\xi = 0.02$, $h = 1.0$

Number of Strips	Number of Bands	Number of Quadrature Points	Time (sec)	R_{self}	X_{self}	R_{mutual}	X_{mutual}
12	6	4 × 4	42	0.2906	0.4643	0.2900	0.3897
12	6	8 × 8	65	0.2513	0.4247	0.2494	0.3160
24	12	4 × 4	148	0.2460	0.4241	0.2436	0.3048
24	12	8 × 8	334	0.2284	0.4678	0.2163	0.1983
24	18	8 × 8	678	0.2267	0.4726	0.2135	0.1917
48	24	4 × 4	770	0.2235	0.4714	0.1969	0.1890
48	24	8 × 8	2204	0.2288	0.5464	0.1950	0.09471
Harmonic expansion			20	0.2302	0.5732	0.1874	0.06135

The results using a model with 12 strips, 6 bands, and a 4 x 4 quadrature are very poor. Increasing the quadrature to 8 x 8 does not improve the results much. Increased subdivision gradually improves the results. However, even with 48 strips, 24 bands, and an 8 x 8 quadrature, considerable error occurs in the mutual reactance. A good far-field pattern should be obtained for this model, but more subdivisions and increased computer time would be required to obtain very accurate impedances.

Example III. Two Spheres

To determine the capability of CHIEF regarding multiple surfaces, the two-sphere problem, whose geometry is shown in Fig. 3, was considered. The spheres were chosen to have $ka = 1.0$, where a is the radius of each sphere, and were separated by a distance equal to their radii. One sphere was pulsating uniformly, while the other one was rigid. The two-sphere problem has been solved analytically by New (4) using expansions in spherical wave functions.

Fig. 3 - Two-sphere geometry
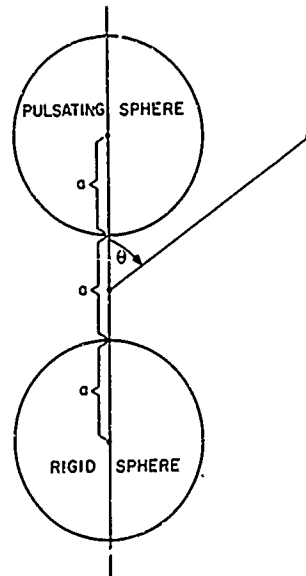
Consider the near-field pressure magnitude on the axis of the system, as shown in Fig. 4. The dashed line represents the $1/r$ dependence to be expected if the rigid sphere were not present. The results of New are represented by the solid line, while the dots represent the results of CHIEF using 6 strips, 6 bands, and a 4 × 4 quadrature on each sphere. The pressures are normalized to the pressure magnitude that would exist on the surface of the pulsating sphere if the rigid sphere were not present. The maximum error was less than 6%. When 10 strips, 10 bands, and a 4 × 4 quadrature were used, the maximum error was reduced to less than 1%.

The far-field pressure pattern in the plane bisecting the spheres was also calculated using the CHIEF model with 6 strips, 6 bands, and a 4 × 4 quadrature on each sphere. Figure 5 gives the pattern as a function of the polar angle θ. Again the solid line represents the results of New, while the CHIEF results are represented by dots. As expected, considering the good accuracy of the near-field results, the far-field is extremely accurate. The total computation time for the two-sphere problem using the coarser subdivision scheme was 126 sec.

GEOMETRICAL OPTIONS

CHIEF is not restricted to a specific coordinate geometry. Any convenient coordinate representation may be used to describe the surface. However, the free-space Green's function and its normal derivative are described internally in CHIEF in terms of a Cartesian coordinate system. Therefore, input subroutines are required which contain conversion formulas giving the Cartesian coordinates of an arbitrary surface point
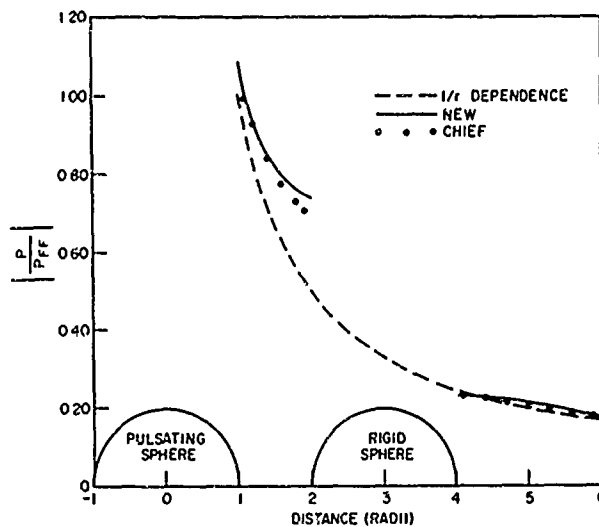
Fig. 4 - Near-field pressure distribution on the
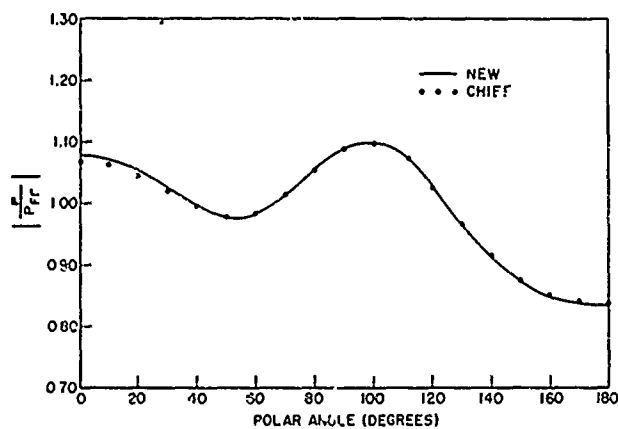axis of two spheres, one pulsating and one rigid

Fig. 5 - The far-field pressure distribution for
two spheres, one pulsating and one rigid

as well as the Cartesian components of the normal vector to the surface at that point.
The area element associated with the surface coordinates is also required. The entire
closed surface is separated into regions such that each region is describable in terms of
a single geometry. Each region is assigned an integer index that corresponds to the
appropriate conversion formulas in the input subroutines.

In an effort to increase the utility of CHIEF, conversion formulas have been added
to the input subroutines so that a wide range of geometrical options is available. These
options, which are listed in Table 3, are discussed below. Included are formulas giving
the Cartesian coordinates (x, y, z), the Cartesian components of the unit normal $\hat{e}_n$,
and the magnitude of the area element dS for any surface point (u, v) (Ref. 5). The
notation $(u, v) = (a, b)$ means that a and b are the two surface coordinates. Any of
the surfaces can be translated or rotated by modifying the formulas giving the Cartesian
coordinates. For example, option 15 describes the outside surface of a sphere centered

at $(x, y, z) = (0, 0, 0)$. To describe a sphere centered at $(x, y, z) = (c, 0, 0)$, change the equation for x in terms of the surface coordinates $(u, v) = (\theta, \phi)$ to $x = CC(33) \sin u \cos v + c$.

1. yz plane with Cartesian coordinates, $(u, v) = (y, z)$, normal in $+x$ direction.

x = Constant = $CC(1)$

$y = u$

$z = v$

$\hat{e}_n = \hat{e}_x$

$dS = du\ dv$

2. yz plane with Cartesian coordinates, $(u, v) = (y, z)$, normal in $-x$ direction.

x = Constant = $CC(2)$

$y = u$

$z = v$

$\hat{e}_n = -\hat{e}_x$

$dS = du\ dv$

3. xz plane with Cartesian coordinates, $(u, v) = (x, z)$, normal in $+y$ direction.

$x = u$

y = Constant = $CC(3)$

Table 3
Geometrical Options Added to CHIEF

Surface	Direction of Normal to Surface	Surface	Direction of Normal to Surface
1. yz plane	$+x$	11. Outside of circular cylinder	Outward
2. yz plane	$-x$	12. Inside of circular cylinder	Inward
3. xz plane	$+y$	13. Outside of elliptical cylinder	Outward
4. xz plane	$-y$	14. Inside of elliptical cylinder	Inward
5. xy plane	$+z$	15. Sphere	Outward
6. xy plane	$-z$	16. Oblate spheroid	Outward
7. xy plane, polar coordinates	$+z$	17. Prolate spheroid	Outward
8. xy plane, polar coordinates	$-z$	18. Toroid	Outward
9. xy plane, elliptical coordinates	$+z$		
10. xy plane, elliptical coordinates	$-z$		

$z = v$

$\hat{e}_n = \hat{e}_y$

$ds = du\ dv$

4. xz plane with Cartesian coordinates, $(u, v) = (x, z)$, normal in $-y$ direction.

$x = u$

$y = \text{Constant} = CC(4)$

$z = v$

$\hat{e}_n = -\hat{e}_y$

$dS = du\ dv$

5. xy plane with Cartesian coordinates, $(u, v) = (x, y)$, normal in $+z$ direction.

$x = u$

$y = v$

$z = \text{Constant} = CC(5)$

$\hat{e}_n = \hat{e}_z$

$dS = du\ dv$

6. xy plane with Cartesian coordinates, $(u, v) = (x, y)$, normal in $-z$ direction.

$x = u$

$y = v$

$z = \text{Constant} = CC(6)$

$\hat{e}_n = -\hat{e}_z$

$dS = du\ dv$

7. xy plane with polar coordinates (r, θ), $0 \le r < \infty$, $0 \le \theta < 2\pi$, $(u, v) = (r, \theta)$, normal in $+z$ direction.

    In the xy plane the curve of constant r is a circle of radius r centered at (x, y) $= (0, 0)$, and the curve of constant θ is a semi-infinite line originating at (x, y) $= (0, 0) \cdot$

$x = u \cos v$

$y = u \sin v$

$z = \text{Constant} = CC(7)$

$\hat{e}_n = \hat{e}_z$

$dS = u\ du\ dv$

8. xy plane with polar coordinates (r, θ), $0 \leqslant r < \infty$, $0 \leqslant \theta < 2\pi$, $(u, v) \equiv (r, \theta)$ normal in $-z$ direction.

In the xy plane the curve of constant r is a circle of radius r centered at $(x, y) = (0, 0)$, and the curve of constant θ is a semi-infinite line originating at $(x, y) = (0, 0)$ ·

$x = u \cos v$

$y = u \sin v$

$z = \text{Constant} = \text{CC}(8)$

$\hat{e}_n = -\hat{e}_z$

$dS = u \; du \; dv$

9. xy plane with elliptical coordinates (μ, ψ), $1 \leqslant \mu < \infty$, $0 \leqslant \psi < 2\pi$, $(u, v) \equiv (\mu, \psi)$, normal in $+z$ direction.

In the xy plane the curve of constant μ is an ellipse of interfocal distance $2 \, \text{CC}(9)$ centered at $(x, y) = (0, 0)$, and the curve of constant ψ is a hyperbola which is orthogonal to the family of ellipses for the same value of $\text{CC}(9)$.

$x = \text{CC}(9) \; u \cos v$

$y = \text{CC}(9) \; (u^2 - 1)^{\frac{1}{2}} \sin v$

$z = \text{Constant} = \text{CC}(10)$

$\hat{e}_n = \hat{e}_z$

$dS = \text{CC}(9)^2 \; (u^2 - 1)^{-\frac{1}{2}} \; (u^2 - \cos^2 v) \; du \; dv$

10. xy plane with elliptical coordinates (μ, ψ), $1 \leqslant \mu < \infty$, $0 \leqslant \psi < 2\pi$, $(u, v) \equiv (\mu, \psi)$, normal in $-z$ direction.

In the xy plane the curve of constant μ is an ellipse of interfocal distance $2 \, \text{CC}(12)$ centered at $(x, y) = (0, 0)$, and the curve of constant ψ is a hyperbola which is orthogonal to the family of ellipses for the same value of $\text{CC}(12)$.

$x = \text{CC}(12) \; u \cos v$

$y = \text{CC}(12) \; (u^2 - 1)^{\frac{1}{2}} \sin v$

$z = \text{Constant} = \text{CC}(13)$

$\hat{e}_n = -\hat{e}_z$

$dS = \text{CC}(12)^2 \; (u^2 - 1)^{-\frac{1}{2}} \; (u^2 - \cos^2 v) \; du \; dv$

11. Outside surface of a circular cylinder along the z axis, $(u, v) = (z, \theta)$ $-\infty < z < \infty$, $0 \leq \theta < 2\pi$, normal outward from the cylinder. The radius of the cylinder is a constant given by $CC(15)$.

On the cylindrical surface the curve of constant z is a circle of radius $CC(15)$ centered at $(x, y, z) = (0, 0, z)$, and the curve of constant θ is a line parallel to the z axis.

$x = CC(15) \cos v$

$y = CC(15) \sin v$

$z = u$

$\hat{e}_n = \hat{e}_x \cos v + \hat{e}_y \sin v$

$dS = CC(15) \, du \, dv$

12. Inside surface of a circular cylinder along the z axis, $(u, v) = (z, \theta)$, $-\infty < z < \infty$, $0 \leq \theta < 2\pi$, normal inward. The radius of the cylinder is a constant given by $CC(16)$.

On the cylindrical surface the curve of constant z is a circle of radius $CC(16)$ centered at $(x, y, z) = (0, 0, z)$, and the curve of constant θ is a line parallel to the z axis.

$x = CC(16) \cos v$

$y = CC(16) \sin v$

$z = u$

$\hat{e}_n = -\hat{e}_x \cos v - \hat{e}_y \sin v$

$dS = CC(16) \, du \, dv$

13. Outside surface of an elliptic cylinder along the z axis, $(u, v) = (z, \psi)$, $-\infty < z < \infty$, $0 \leq \psi < 2\pi$, normal outward from the cylinder. The interfocal distance of the elliptic cross section is given by $2CC(17)$. The surface is one of constant $\mu = CC(18)$, where $1 \leq \mu < \infty$.

On the cylindrical surface the curve of constant z is an ellipse of interfocal distance $2 CC(17)$ centered at $(x, y, z) = (0, 0, z)$, and the curve of constant ψ is a line parallel to the z axis, one of the two lines produced by the intersection of a hyperbolic cylinder and the elliptic cylinder.

$x = CC(17) \, CC(18) \cos v$

$y = CC(17) \, [CC(18)^2 - 1]^{\frac{1}{2}} \sin v$

$z = u$

$\hat{e}_n = \hat{e}_x \left[\dfrac{CC(18)^2 - 1}{CC(18)^2 - \cos^2 v}\right]^{\frac{1}{2}} \cos v + \hat{e}_y \dfrac{CC(18)}{[CC(18)^2 - \cos^2 v]^{\frac{1}{2}}} \sin v$

$dS = CC(17) \, [CC(18)^2 - \cos^2 v]^{\frac{1}{2}} \, du \, dv$

14. Inside surface of an elliptic cylinder along the z axis, $(u, v) = (z, \psi)$, $-\infty < z < \infty$, $0 \leq \psi < 2\pi$, normal inward. The interfocal distance of the elliptic cross section is given by $2CC(25)$. The surface is one of constant $\mu = CC(26)$, where $1 < \mu < \infty$.

On the cylindrical surface the curve of constant z is an ellipse of interfocal distance $2CC(25)$ centered at $(x, y, z) = (0, 0, z)$, and the curve of constant ψ is a line parallel to the z axis, one of the two lines produced by the intersection of a hyperbolic cylinder and the elliptic cylinder.

$x = CC(25)\, CC(26) \cos v$

$y = CC(25)\, [CC(26)^2 - 1]^{\frac{1}{2}} \sin v$

$z = u$

$\hat{e}_n = -\hat{e}_x \left[\dfrac{CC(26)^2 - 1}{CC(26)^2 - \cos^2 v} \right]^{\frac{1}{2}} \cos v - \hat{e}_y \dfrac{CC(26)}{[CC(26)^2 - \cos^2 v]^{\frac{1}{2}}} \sin v$

$dS = CC(25)\, [CC(26)^2 - \cos^2 v]^{\frac{1}{2}}\, du\, dv$

15. Outside surface of a sphere, $(u, v) = (\theta, \phi)$, $0 \leq \theta \leq \pi$, $0 \leq \phi < 2\pi$, normal outward from the sphere. The radius of the sphere is a constant given by $CC(33)$.

On the spherical surface the curve of constant θ is a circle of radius $CC(33) \sin\theta$ centered at $(x, y, z) = (0, 0, CC(33) \cos\theta)$, and the curve of constant ϕ is a half circle between the poles of the sphere.

$x = CC(33) \sin u \cos v$

$y = CC(33) \sin u \sin v$

$z = CC(33) \cos u$

$\hat{e}_n = \hat{e}_x \sin u \cos v + \hat{e}_y \sin u \sin v + \hat{e}_z \cos u$

$dS = CC(33) \sin u\, du\, dv$

16. Outside surface of an oblate spheroid, $(u, v) = (\eta, \phi)$, $0 \leq \eta \leq \pi$, $0 \leq \phi < 2\pi$, normal outward from the spheroid. The interfocal length of the spheroid is a constant given by $2CC(34)$. The surface is one of constant $\xi = CC(35)$, where $0 \leq \xi < \infty$.

On the spheroidal surface the curve of constant ϕ is a half ellipse containing the poles of the spheroid, and the curve of constant η is a circle of radius $CC(34)\, [\xi^2 + 1]^{\frac{1}{2}} \sin \eta$ centered at $(x, y, z) = (0, 0, CC(34)\, CC(35) \cos \eta)$. The z axis is the axis of symmetry.

$x = CC(34)\, [CC(35)^2 + 1]^{\frac{1}{2}} \sin u \cos v$

$y = CC(34)\, [CC(35)^2 + 1]^{\frac{1}{2}} \sin u \sin v$

$z = CC(34)\, CC(35) \cos u$

$$\hat{e}_n = \hat{e}_x \, CC(35) \, [CC(35)^2 + \cos^2 u]^{-\frac{1}{2}} \sin u \cos v$$

$$+ \, \hat{e}_y \, CC(35) \, [CC(35)^2 + \cos^2 u]^{-\frac{1}{2}} \sin u \sin v$$

$$+ \, \hat{e}_z \, [CC(35)^2 + 1]^{+\frac{1}{2}} \, [CC(35)^2 + \cos^2 u]^{-\frac{1}{2}} \cos u$$

$$dS = CC(34)^2 \, [CC(35)^2 + 1]^{\frac{1}{2}} \, [CC(35)^2 + \cos^2 u]^{\frac{1}{2}} \sin u \, du \, dv$$

17. Outside surface of a prolate spheroid, $(u, v) = (\eta, \phi)$, $0 \le \eta \le \pi$, $0 \le \phi < 2\pi$, normal outward from the spheroid. The interfocal length of the spheroid is a constant given by $2CC(42)$. The surface is one of constant $\xi = CC(43)$, where $1 \le \xi < \infty$.

On the spheroidal surface the curve of constant ϕ is a half ellipse containing the poles of the spheroid, and the curve of constant η is a circle of radius $CC(42) \, [\xi^2 - 1]^{\frac{1}{2}} \sin \eta$ centered at $(x, y, z) = (0, 0, CC(42) \, CC(43) \cos \eta)$. The z axis is the axis of symmetry.

$$x = CC(42) \, [CC(43)^2 - 1]^{\frac{1}{2}} \sin u \cos v$$

$$y = CC(42) \, [CC(43)^2 - 1]^{\frac{1}{2}} \sin u \sin v$$

$$z = CC(42) \, CC(43) \cos u$$

$$\hat{e}_n = \hat{e}_x \, CC(43) \, [CC(43)^2 - \cos^2 u]^{-\frac{1}{2}} \sin u \cos v$$

$$+ \, \hat{e}_y \, CC(43) \, [CC(43)^2 - \cos^2 u]^{-\frac{1}{2}} \sin u \sin v$$

$$+ \, \hat{e}_z \, [CC(43)^2 - 1]^{\frac{1}{2}} \, [CC(43)^2 - \cos^2 u]^{-\frac{1}{2}} \cos u$$

$$dS = CC(42)^2 \, [CC(43)^2 - 1]^{\frac{1}{2}} \, [CC(43)^2 - \cos^2 u]^{\frac{1}{2}} \sin u \, du \, dv$$

18. Outside surface of a toroid, $(u, v) = (\eta, \phi)$, $-\pi < \eta < \pi$, $0 < \phi < 2\pi$, normal outward from the toroid. The toroid is characterized by two radii $CC(49)$ and $CC(50)$. The ratio of these two radii $CC(51)$, $1 < CC(51) < \infty$, forms an orthogonal system with η and ϕ and is a constant over the toroidal surface. To completely characterize the surface, a second constant $CC(52) = [CC(50)^2 - CC(49)^2]^{\frac{1}{2}}$ is defined.

Thus the surface may be defined by giving either the constants $CC(49)$ and $CC(50)$ or the constants $CC(51)$ and $CC(52)$. Because the two radii are easier to visualize, $CC(49)$ and $CC(50)$ will be the input for CHIEF.

On the toroidal surface the curve of constant ϕ is a circle produced by the intersection of a half plane containing the z axis and the toroid, and the curve of constant η is a circle produced by the intersection of a spherical bowl and the toroid. The z axis is the symmetry axis for the toroid.

$$x = [CC(50)^2 - CC(49)^2] \cos v / [CC(50) - CC(49) \cos u]$$

$$y = [CC(50)^2 - CC(49)^2] \sin v / [CC(50) - CC(49) \cos u]$$

$$z = CC(49) \, [CC(50)^2 - CC(49)^2]^{\frac{1}{2}} \sin u / [CC(50) - CC(49) \cos u]$$

$$\hat{e}_n = -\hat{e}_x \; [CC(49) - CC(50) \cos u] \cos v/ [CC(50) - CC(49) \cos u]$$

$$- \hat{e}_y \; [CC(49) - CC(50) \cos u] \sin v/ [CC(50) - CC(49) \cos u]$$

$$+ \hat{e}_z \; [CC(50)^2 - CC(40)^2]^{\frac{1}{2}} \sin u/ [CC(50) - CC(49) \cos u]$$

$$dS = CC(49) \; [CC(50)^2 - CC(49)^2]^{\frac{1}{2}}/ [CC(50) - CC(49) \cos u]^2 \; du \; dv$$

The input subroutines providing for these geometrical options are listed in the appendix. Note that the two subroutines CCOORD and CCUNMD already exist in CHIEF. CCOORD (U, V, NEQN, A1, A2, A3) is called in CHIEF whenever only the Cartesian coordinates (A1, A2, A3) are desired for a surface point (U, V). The index NEQN refers to the particular geometrical option. The subroutine CCUNMD (U, V, NEQN, AX1, AX2, AX3, AN1, AN2, AN3, RMAGD) is called whenever all of the surface information is desired; i.e., it provides the Cartesian coordinates (AX1, AX2, AX3), the Cartesian components of the unit normal to the surface (AN1, AN2, AN3), and the magnitude of the surface area element RMAGD.

Note that the set of constants C1, C2, C3, ... in CHIEF have been replaced by an array of constants CC(100). The declaration COMMON/ALLC/CC(100) must be substituted in the main program and in CCOORD and CCUNMD for the declaration COMMON/ALLC/C1, C2, C3, ... These constants are quantities that do not vary over the surface and must be input or calculated in the main program. Every combination of constants appearing in the conversion formulas is calculated and stored in CC(100). This reduces the computation time considerably, since the calculation is only performed once instead of every time the subroutines CCOORD and CCUNMD are called.

Most of the input constants refer to a distance and are described in terms of a unit of length called WAVE= $1/k = \lambda/2\pi = c/\omega$. However, some of the input constants in options 13, 14, 16, and 17 are pure numbers and represent ratios of distances. Reference to the previous description of the geometrical options will indicate which parameters the input constants represent.

Option 19 in subroutine CCOORD provides interior points and should be modified to fit the specific geometry whenever interior points are required.

SUMMARY

The following observations may aid the potential user of CHIEF.

1.   CHIEF evaluates the solution to a boundary-value problem. This will be a realistic transducer model when the velocities are known; for example, when velocity control exists.

2.   CHIEF is a very flexible program, allowing the user a wide range of options. Reducing it to a production program, capable of being used by casual acquaintances, would remove this flexibility. If only a specific geometry is of interest, the user is advised to write a CHIEF-like program taking advantage of the peculiarities of that geometry. This will be more economical in the long run, if the program is to be used extensively. If the frequencies of interest are well below the lowest critical frequency, a simple source method, where the pressure is obtainable in terms of a single integral, might be considered.

3.   If rotational or reflective symmetry is not present, the computation times increase significantly. The possibility of using rotational or reflective symmetry should be examined carefully. If both are applicable, it is usually best to use rotational symmetry.

4. The results obtained using CHIEF approach the correct solution as the subdivision is increased. Surprisingly good results can be obtained, especially for the far field, using a relatively crude subdivision scheme. However, objects that are thin may require an unusually fine subdivision. Also, as the acoustic size is increased, the number of subdivisions required to give accurate results will also increase. However, this limitation, which is fundamental to the finite-element method, will be less restrictive in the future as computers are improved.

5. This report describes new input subroutines to CHIEF that provide for a wide range of geometrical options. Most of the standard geometries have been included. Surfaces of complex objects such as a free-flooded ring can be described by combining two or more of the options. The user can easily add additional geometries that are desired.

ACKNOWLEDGMENT

REFERENCES

1. Schenck, H.A., "Improved Integral Formulation for Acoustic Radiation Problems," J. Acoust. Soc. Am. 44:41-58 (1968)

2. Barach, D., and Schenck, H.A., "CHIEF Computer Program Documentation," Mari Contract Reference 66, Naval Undersea Research & Development Center, San Diego, Calif., 1969

3. Van Buren, A.L., Baier, R.V., and Hanish, S., "A Fortran Computer Program for Calculating the Oblate Spheroidal Radial Functions of the First and Second Kind and their First Derivatives," NRL Report 6959, Jan. 20, 1970

4. New, R., "Acoustic Radiation from Multiple Surfaces," Dissertation, Catholic University of America, 1970

5. Moon, P., and Spencer, D.E., "Field Theory Handbook," Berlin:Springer-Verlag, 1961

LISTING OF THE SUBROUTINES CCOORD
AND CCUNMD AND THEIR REQUIRED INPUT

```
      SUBROUTINE CCOORD(U,V,NEGN,A1,A2,A3)
      COMMON/ALLC/CC(100)
      GO TO (1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18,19) NEGN
    1 A1=CC(1)
      A2=U
      A3=V
      RETURN
    2 A1=CC(2)
      A2=U
      A3=V
      RETURN
    3 A1=U
      A2=CC(3)
      A3=V
      RETURN
    4 A1=U
      A2=CC(4)
      A3=V
      RETURN
    5 A1=U
      A2=V
      A3=CC(5)
      RETURN
    6 A1=U
      A2=V
      A3=CC(6)
      RETURN
    7 A1=U*COS(V)
      A2=U*SIN(V)
      A3=CC(7)
      RETURN
    8 A1=U*COS(V)
      A2=U*SIN(V)
      A3=CC(8)
      RETURN
    9 A1=CC(9)*U*COS(V)
      A2=CC(9)*SQRT(U*U-1.)*SIN(V)
      A3=CC(10)
      RETURN
   10 A1=CC(12)*U*COS(V)
      A2=CC(12)*SQRT(U*U-1.)*SIN(V)
      A3=CC(13)
      RETURN
   11 A1=CC(15)*COS(V)
      A2=CC(15)*SIN(V)
      A3=U
      RETURN
   12 A1=CC(16)*COS(V)
      A2=CC(16)*SIN(V)
      A3=U
      RETURN
   13 A1=CC(21)*COS(V)
      A2=CC(22)*SIN(V)
      A3=U
      RETURN
```

17

```
   14 A1=CC(29)*COS(V)
      A2=CC(30)*SIN(V)
      A3=U
      RETURN
   15 RSINU=CC(33)*SIN(U)
      A1=RSINU*COS(V)
      A2=RSINU*SIN(V)
      A3=CC(33)*COS(U)
      RETURN
   16 CCSINU=CC(39)*SIN(U)
      A1=CCSINU*COS(V)
      A2=CCSINU*SIN(V)
      A3=CC(37)*COS(U)
      RETURN
   17 CCSINU=CC(47)*SIN(U)
      A1=CCSINU*COS(V)
      A2=CCSINU*SIN(V)
      A3=CC(45)*COS(U)
      RETURN
   18 FAC=CC(54)/(CC(51)-COS(U))
      A1=FAC*COS(V)
      A2=FAC*SIN(V)
      A3=FAC*SIN(U)*CC(55)
      RETURN
   19 A1=0.
      A2=U
      A3=CC(60)
      RETURN
      END


      SUBROUTINE CCUNMD(U,V,NEQN,AX1,AX2,AX3,AN1,AN2,AN3,RMAGD)
      COMMON/ALLC/CC(100)
      GO TO (1,2,3,4,5,6,7,8,9,10,11,12,13,14,15,16,17,18) NEQN
    1 AN1=1.
      AN2=0.
      AN3=0.
      RMAGD=1.
      AX1=CC(1)
      AX2=U
      AX3=V
      RETURN
    2 AN1=-1.
      AN2=0.
      AN3=0.
      RMAGD=1.
      AX1=CC(2)
      AX2=U
      AX3=V
      RETURN
    3 AN1=0.
      AN2=1.
      AN3=0.
      RMAGD=1.
      AX1=U
      AX2=CC(3)
      AX3=V
      RETURN
    4 AN1=0.
      AN2=-1.
      AN3=0.
      RMAGD=1.
      AX1=U
      AX2=CC(4)
```

```
      AX3=V
      RETURN
    5 AN1=0,
      AN2=0.
      AN3=1.
      RMAGD=1.
      AX1=U
      AX2=V
      AX3=CC(5)
      RETURN
    6 AN1=0.
      AN2=0.
      AN3=-1.
      RMAGD=1.
      AX1=U
      AX2=V
      AX3=CC(6)
      RETURN
    7 AN1=0.
      AN2=0.
      AN3=1.
      RMAGD=U
      AX1=U*COS(V)
      AX2=U*SIN(V)
      AX3=CC(7)
      RETURN
    8 AN1=0.
      AN2=0.
      AN3=-1.
      RMAGD=U
      AX1=U*COS(V)
      AX2=U*SIN(V)
      AX3=CC(8)
      RETURN
    9 COSV=COS(V)
      COSVS=COSV*COSV
      UU=U*U
      SQ=SQRT(UU-1.)
      AN1=0.
      AN2=0.
      AN3=1.
      RMAGD=CC(11)*(UU-COSVS)/SQ
      AX1=CC(9)*U*COSV
      AX2=CC(9)*SQ*SQRT(1.-COSVS)
      AX3=CC(10)
      RETURN
   10 COSV=COS(V)
      UU=U*U
      COSVS=COSV*COSV
      SQ=SQRT(UU-1.)
      AN1=0.
      AN2=0.
      AN3=-1.
      RMAGD=CC(14)*(UU-COSVS)/SQ
      AX1=CC(12)*U*COSV
      AX2=CC(12)*SQ*SQRT(1.-COSVS)
      AX3=CC(13)
      RETURN
   11 AN1=COS(V)
      AN2=SIN(V)
      AN3=0.
      RMAGD=CC(15)
      AX1=CC(15)*AN1
      AX2=CC(15)*AN2
```

A. L. VAN BUREN

```
      AX3=U
      RETURN
   12 AN1=-COS(V)
      AN2=-SIN(V)
      AN3=0.
      RMAGD=CC(16)
      AX1=-CC(16)*AN1
      AX2=-CC(16)*AN2
      AX3=U
      RETURN
   13 COSV=COS(V)
      COSVS=COSV*COSV
      SINV=SQRT(1.-COSVS)
      DENS=1.D/SQRT(CC(19)-COSVS)
      AN1=CC(20)*DENS*COSV
      AN2=CC(18)*DENS*SINV
      AN3=0.
      RMAGD=CC(17)/DENS
      AX1=CC(21)*COSV
      AX2=CC(22)*SINV
      AX3=U
      RETURN
   14 COSV=COS(V)
      COSVS=COSV*COSV
      SINV=SQRT(1.-COSVS)
      DENS=1./SQRT(CC(27)-COSVS)
      AN1=-CC(28)*DENS*COSV
      AN2=-CC(26)*DENS*SINV
      AN3=0.
      RMAGD=CC(25)/DENS
      AX1=CC(29)*COSV
      AX2=CC(30)*SINV
      AX3=U
      RETURN
   15 SINU=SIN(U)
      AN1=SINU*COS(V)
      AN2=SINU*SIN(V)
      AN3=COS(U)
      RMAGD=CC(33)*SINU
      AX1=CC(33)*AN1
      AX2=CC(33)*AN2
      AX3=CC(33)*AN3
      RETURN
   16 COSV=COS(V)
      SINV=SIN(V)
      COSU=COS(U)
      COSUS=COSU*COSU
      SINU=SQRT(1.-COSUS)
      FAC=1./SQRT(CC(36)+COSUS)
      CCSINU=CC(39)*SINU
      GAC=FAC*CC(35)*SINU
      AN1=GAC*COSV
      AN2=GAC*SINV
      AN3=FAC*CC(38)*COSU
      RMAGD=CC(40)*SINU/FAC
      AX1=CCSINU*COSV
      AX2=CCSINU*SINV
      AX3=CC(37)*COSU
      RETURN
   17 COSV=COS(V)
      SINV=SIN(V)
      COSU=COS(U)
      COSUS=COSU*COSU
```

```
       SINU=SQRT(1.-COSUS)
       FAC=1./SQRT(CC(44)-COSUS)
       CCSINU=CC(47)*SINU
       GAC=FAC*CC(43)*SINU
       AN1=GAC*COSV
       AN2=GAC*SINV
       AN3=FAC*CC(46)*COSU
       RMAGD=CC(48)*SINU/FAC
       AX1=CCSINU*COSV
       AX2=CCSINU*SINV
       AX3=CC(45)*COSU
       RETURN
18     COSV=COS(V)
       SINV=SIN(V)
       COSU=COS(U)
       SINU=SIN(U)
       BAC=1./(CC(51)-COSU)
       CAC=BAC*(1.-CC(51)*COSU)
       FAC=BAC*CC(54)
       AN1=-CAC*COSV
       AN2=-CAC*SINV
       AN3= CC(53)*SINU*BAC
       RMAGD=CC(56)*BAC*BAC
       AX1=FAC*COSV
       AX2=FAC*SINV
       AX3=FAC*SINU*CC(55)
       RETURN
       END


  1  CC(1)=1.*WAVE

  2  CC(2)=1.*WAVE

  3  CC(3)=1.*WAVE

  4  CC(4)=1.*WAVE

  5  CC(5)=1.*WAVE

  6  CC(6)=1.*WAVE

  7  CC(7)=.575*WAVE

  8  CC(8)=-.575*WAVE

  9  CC(9)=1.*WAVE
     CC(10)=1.
     CC(11)=CC(9)*CC(9)

 10  CC(12)=1.*WAVE
     CC(13)=1.
     CC(14)=CC(12)*CC(12)

 11  CC(15)=1.00*WAVE

 12  CC(16)=1.85*WAVE

 13  CC(17)=1.*WAVE
     CC(18)=1.
     CC(19)=CC(18)*CC(18)
     CC(20)=SQRT(CC(19)-1.)
     CC(21)=CC(17)*CC(18)
     CC(22)=CC(17)*CC(20)
```

```
14 CC(25)=1.*WAVE
   CC(26)=1.
   CC(27)=CC(26)*CC(26)
   CC(28)=SQRT(CC(27)-1.)
   CC(29)=CC(25)*CC(26)
   CC(30)=CC(25)*CC(28)

15 CC(33)=1.*WAVE

16 CC(34)=1.*WAVE
   CC(35)=.2
   CC(36)=CC(35)*CC(35)
   CC(37)=CC(34)*CC(35)
   CC(38)=SQRT(CC(36)+1.)
   CC(39)=CC(34)*CC(38)
   CC(40)=CC(39)*CC(34)

17 CC(42)=1.*WAVE
   CC(43)=1.
   CC(44)=CC(43)*CC(43)
   CC(45)=CC(42)*CC(43)
   CC(46)=SQRT(CC(44)-1.)
   CC(47)=CC(42)*CC(46)
   CC(48)=CC(47)*CC(42)

18 CC(49)=.18*WAVE
   CC(50)=1.86*WAVE
   CC(51)=CC(50)/CC(49)
   CC(52)=SQRT(CC(50)*CC(50)-CC(49)*CC(49))
   CC(53)=CC(52)/CC(49)
   CC(54)=CC(52)*CC(53)
   CC(55)=1./CC(53)
   CC(56)=CC(54)*CC(52)
```

DOCUMENT CONTROL DATA - R & D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author)	2a. REPORT SECURITY CLASSIFICATION
Naval Research Laboratory Washington, D. C. 20390	Unclassified
	2b. GROUP

3. REPORT TITLE

A TEST OF THE CAPABILITIES OF CHIEF IN THE NUMERICAL CALCULATION OF ACOUSTIC RADIATION FROM ARBITRARY SURFACES

4. DESCRIPTIVE NOTES *(Type of report and inclusive dates)*
An interim report on a continuing problem.

5. AUTHOR(S) *(First name, middle initial, last name)*

Van Buren, A. L.

6. REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
November 12, 1970	26	5

8a. CONTRACT OR GRANT NO.	9a. ORIGINATOR'S REPORT NUMBER(S)
NRL Problems S01-28 and S02-12 b. PROJECT NO.	NRL Report 7160
Projects RR 102-08-41-5225 and	
c. SF 11-121-31, Task 14080	9b. OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)*
d.	

10. DISTRIBUTION STATEMENT

This document has been approved for public release and sale; its distribution is unlimited.

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
	Department of the Navy (Office of Naval Research and Naval Ship Systems Command), Arlington, Va. 22217, Washington, D. C. 20360

13. ABSTRACT

The computer program CHIEF was designed by Schenck and Barach of the Naval Undersea Research and Development Center to obtain approximate solutions to exterior steady-state acoustic radiation problems for surfaces of arbitrary shape vibrating with a prescribed normal velocity. To test its capabilities as a research tool, CHIEF was applied to several problems for which accurate answers have been obtained using harmonic expansions. The accuracy and computation time of the results using CHIEF are discussed in terms of the surface subdivision scheme and the number of Gaussian quadrature points used to evaluate the Helmholtz integrals. In addition, new input subroutines to CHIEF which provide numerous geometrical options are also discussed.

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Fortran program CHIEF Integral equations, Helmholtz Elastic wave problems Sound transducers Scalar waves						

DD FORM 1473 (BACK) 24

(PAGE 2)